S2 Models 2025 updated

Create Convenient Life

S2 Updated All in One POS

15.6”






15”


Full range of solutions
Celeron, Core Intel and Rockship Android

Windows 10

Windows 11

S2 Updated locations

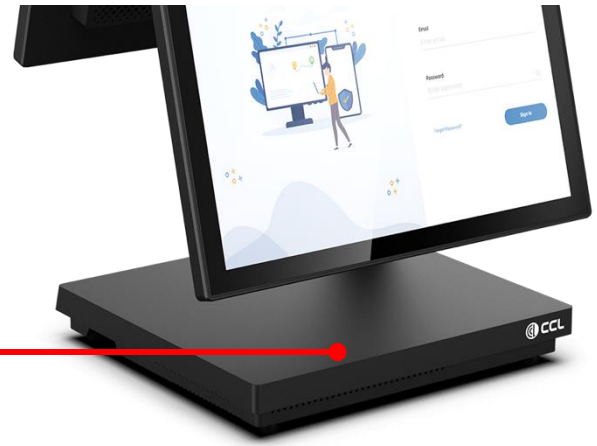

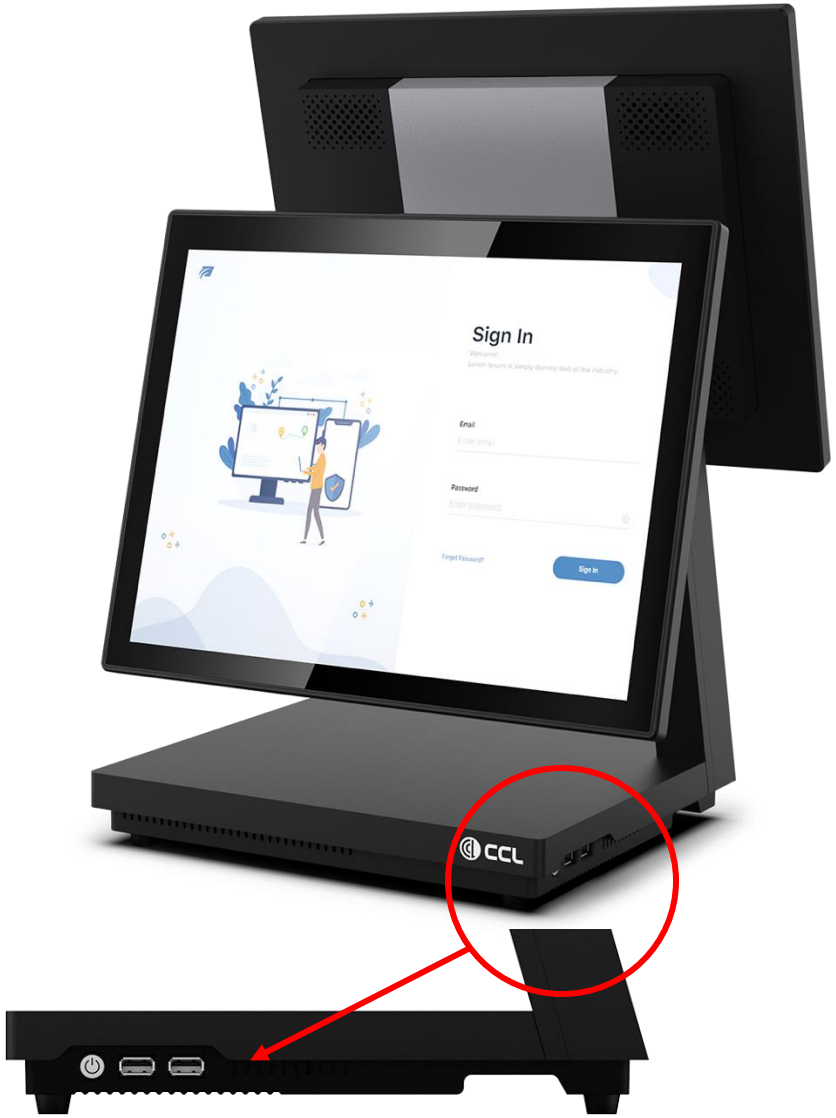

Power + USB2.0*2

S2 Updated Dimensions

S2




S2P



S2 UPDATED Interfaces

RK3399

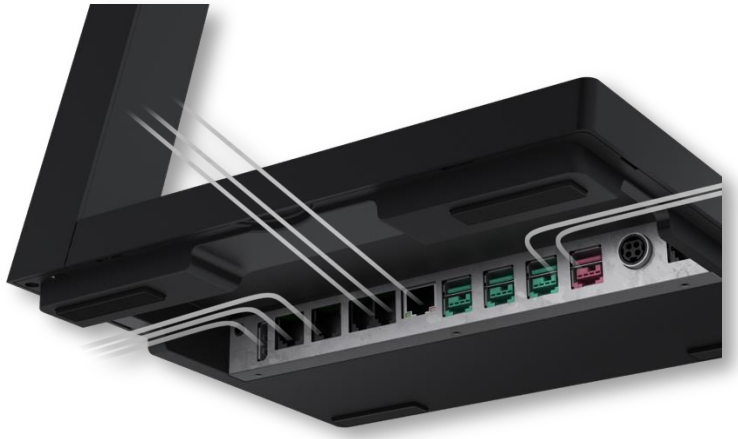

Perfect wiring design

Sufficient cable management space, multi-directional outlet.

Cashbox *1
DC-IN 24V *1
PowerUSB 24V *1
PowerUSB 12V *3
DP *1
LAN *1
RJ48 *2
RJ11*2
AUDIO *1

Core i3/i5



Cashbox *1
DC-IN 24V *1
PowerUSB 24V *1
PowerUSB 12V *1
DC-OUT *1
HDMI *1
USB 3.0 *4
LAN *1
RJ48 *2
AUDIO *1

Celeron J6412



Cashbox *1
DC-IN 24V *1
PowerUSB 24V *1
PowerUSB 12V *1
DC-OUT *1
HDMI *1
LAN *1
USB 2.0 *2
USB 3.0 *2
RJ48 *2
AUDIO *1

POS	S2/S2P Core intel	S2/S2P Celeron	S2P Android
POS	S2/S2P	S2/S2P	S2P
Specification			
OS Support	Win 10 / Win 11 / Linux	Win 10 / Win 11 / Linux	Android 9.0
Processor	Intel® Core™ i3-1215U Processor 10M Cache, up to 4.40 GHz, with IPU Intel® Core™ i5-1235U Processor 12M Cache, up to 4.40 GHz	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz	Rockchip RK3399, Dual-core Cortex A72 up to 1.8GHz + Quad-core Cortex A53 up to 1.4GHz
System Memory	DDR4 4GB / 8GB	DDR4 4GB / 8GB / 16GB	DDR3 4GB
Storage Device	M.2 SATA 128GB /256GB	M.2 SATA 128GB /256GB / 512GB	eMMC 32GB
RAID Function	SATA SSD	SATA SSD	N/A
Serial Port	2, RJ48 x 2	2, RJ48 x 2	4, RJ12 x 2 + RJ50 x 2
Standard USB Port	6, USB 3.0 x 4, SIDE PORT USB 2.0 x 2	6, USB 3.0 x 2, USB 2.0 x 2, SIDE PORT USB 2.0 x 2	2, USB 3.0 x 2
PoweredUSB Port	2 powered ports 24V Powered USB x 1 + 12V Powered USB x 1	2 powered ports (Optional), 24V Powered USB x 1+ 12V Powered USB x 1	4 powered ports ,24V Powered USB x 1+ 12V Powered USB x 3
OTG USB	N/A	N/A	USB 2.0 x 1
LAN Port	10/100/1000 Mb x 1	10/100/1000 Mb x 1	10/100/1000 Mb x 1
Display Port	HDMI x 1	HDMI x 1	DP x 1
CR Port	1, supporting 24V cash drawer	1, supporting 24V cash drawer	1, supporting 24V cash drawer
Audio	Internal 2W speaker x 2	Internal 2W speaker x 2	Internal 2W speaker x 2
Expansion Slot	M.2 SATA x 1	M.2 SATA x 1	N/A
Display & Touch			
LCD	15” TFT LCD (S2) or 15.6" TFT LCD (S2P)	15” TFT LCD (S2) or 15.6" TFT LCD (S2P)	15.6" TFT LCD only
Resolution	1024 x 768 or 1920 x 1080	1024 x 768 or 1920 x 1080	1920 x 1080
Touch (Optional)	True-flat PCAP touch with multi-touch support	True-flat PCAP touch with multi-touch support	True-flat PCAP touch with multi-touch support
The Second Display & Touch(Optional)			
LCD	15” TFT LCD (S2) or 15.6" TFT LCD (S2P)	15” TFT LCD (S2) or 15.6" TFT LCD (S2P)	15.6" TFT LCD
Resolution	1024 x 768 or 1920 x 1080	1024 x 768 or 1920 x 1080	1920 x 1080
Touch(Optional)	True-flat PCAP touch with multi-touch support	True-flat PCAP touch with multi-touch support	True-flat PCAP touch with multi-touch support
Physical Dimension			
Dimension (W x D x H in mm)	230* 385 *410mm（single screen） 280* 385 *410mm（Dual screen）	230* 385 *410mm（single screen） 280* 385 *410mm（Dual screen）	230* 385 *410mm（single screen） 280* 385 *410mm（Dual screen）
Weight (N. W. in kg)	5（single screen） 7（Dual screen）	5（single screen） 7（Dual screen）	4.5（single screen） 6.5（Dual screen）
Environmental			
Operating Condition	0°C - 50°C, 20%RH - 90%RH	0°C - 50°C, 20%RH - 90%RH	0°C - 50°C, 20%RH - 90%RH
Storage Condition	-20°C - 70°C, 10%RH - 90%RH	-20°C - 70°C, 10%RH - 90%RH	-20°C - 70°C, 10%RH - 90%RH
Built-in Options			
WiFi	M.2 WiFi module ,Support 2.4G/5G WiFi, Wi-Fi 802.11b/g/n/ac agreement.	M.2 WiFi module ,Support 2.4G/5G WiFi, Wi-Fi 802.11b/g/n/ac agreement.	Support 2.4G WiFi, Wi-Fi 802.11b/g/n agreement.
Attachment Options			
Camera	3D sensory camera, support facial pay	3D sensory camera, support facial pay	3D sensory camera, support facial pay
MSR	3 tracks ISO	3 tracks ISO	3 tracks ISO
COMBOX	N/A	N/A	COMBOX (Printer and Scanner) on Request



CCL TECH

The Self Checkout Company

Paris, France

info@cclyun.eu

Partners with: