
Point of Sale - **S3 Model**

CREATE CONVENIENT LIFE

Engineered to Perfection, Designed for Flow

15-inch

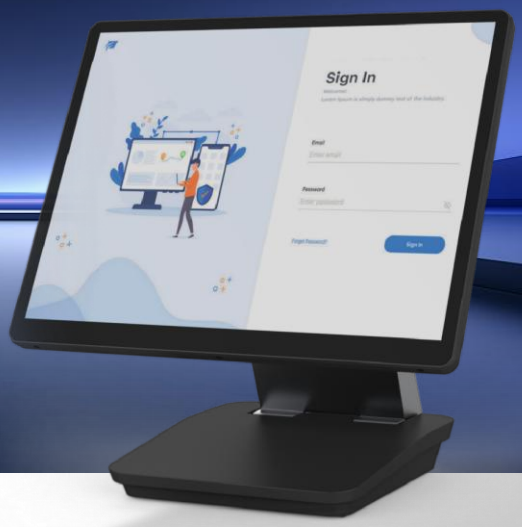

A modular POS platform that adapts to retail and hospitality environments of every size, pairing flexible configuration with dependable, all-day performance.

Outstand performance, Powerful core

Powered by Intel Core processors for blazing-fast performance. Features a fanless, low-power design that ensures silent and stable operation. With finely tuned hardware and software optimization, it delivers a smooth and efficient user experience.

Boundless display, Silk-Touch Response

Full-lamination technology breaks visual barriers, while ultra-slim bezels offer an immersive display. Every swipe feels fluid and instant. Where responsiveness meets comfort, each interaction is perfectly tuned.

Minimalist Form, Masterful Craft

Crafted from full-metal aluminum alloy—rigid yet remarkably light. Finished with premium metallic coating, smooth to the touch like refined skin. Every seam, every curve speaks of meticulous engineering and enduring elegance.

Dual-Axis, Effortless Motion

Smooth multi-angle adjustment with friction-free suspension. Supports 15” and 9.7” secondary screens offering flexible expansion for diverse interactive scenarios.

15" Main Display + 9.7" Customer Display



15" Main Display + 15" Customer Display



Modular Assembly





Point of Sale - S3 Model

CREATE CONVENIENT LIFE

System	
Processor	Intel® N95 4C/4T 3.4GHz 6MB Intel® Core™ i3-1215U Processor 10M Cache, up to 4.40 GHz Intel® Core™ i5-1235U Processor 12M Cache, up to 4.40 GHz
RAM	DDR4 4G (Standard) / 8G / 16G / 32G
Storage	M.2 SATA 128G / 256G / 512G
OS	Win 10 / Win11 / Linux
Power	
Power Supply	12V 84W / 24V 120W（with Expansion Dock）
Display	
Type	15" TFT LCD
Resolution	1024 x 768
Brightness	400 nits
Touch	True-flat PCAP touch with multi-touch support. Full Lamination.
I/O Ports	
Serial	2*RJ50
USB	7*USB: 4*USB 3.0 - 2*USB 2.0 (Back) - & - 1*USB C 2.0
PoweredUSB	
Cash Drawer	1, supporting 24V Cash Drawer
LAN	1*RJ45, 10 / 100 / 1000 MB
Display port	1*USB C (EDP) - for Second Display
Card Reader	1*Card Reader Port, Control 2 CR via optional Y-cable, supports 24V
Audio	2*3W Internal Speakers
Physical & Environmental	
Dimension (W x D x H in mm)	325 x 300 x 348
Weight (N. W. in kg)	4.5Kg (Single screen)
Certification	CE / RoHS
Color	Black
Operating Conditions	0°C - 40°C, 20%RH - 90%RH
Storage Conditions	-20°C - 70°C, 10%RH - 90%RH
Options & Peripherals	
MSR	3 Tracks ISO/NFC
Customer Display	9.7" TFT LCD, 1024 x 768, 350 nits, Non-Touch or Touch 15" TFT LCD, 1024 x 768, 400 nits, Non-Touch or Touch
VFD	2x20 characters VFD
Camera	3D Camera
WiFi Module	Wi-Fi® 802.11a/b/g/n/ac/ax 2.4GHz/5GHz
Other peripherals	Fingerprint Reader Printer 80mm Barcode Scanner desktop Handheld Scanner Cash Drawer



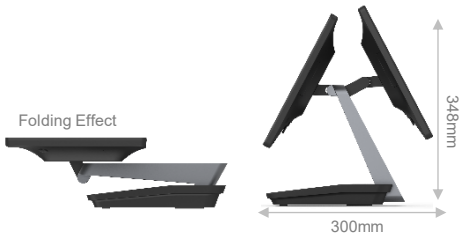



VESA : 75*75mm



BASE PORTS

CE RoHS

Disclaimer: The product information and specifications are subject to change without prior notice

Qingdao CCL Technology Co., Ltd
Building D2, Floor 26, International Innovation Park
Laoshan District, Qingdao
China

CCL Tech SAS
29, Boulevard de la Paix
78100 Saint-Germain-en-Laye
France