
Point of Sale - **S3P Model**

CREATE CONVENIENT LIFE

Engineered to Perfection, Designed for Flow

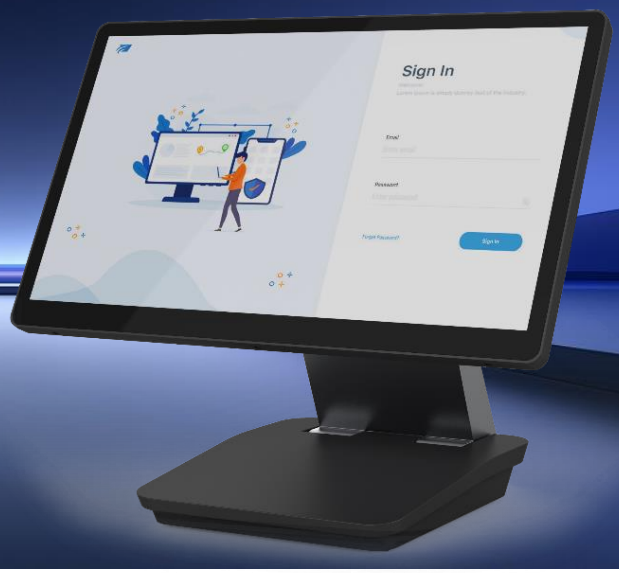

15.6-inch Android

Rockchip

A modular POS platform that adapts to retail and hospitality environments of every size, pairing flexible configuration with dependable, all-day performance.

Exceptional performance, intelligent core

Powered by Rockchip processor with AI acceleration for faster transactions. Features a fanless, low-power design that ensures silent and reliable operation. With optimized Android integration, it delivers a smart and efficient user experience.

Boundless display, Silk-Touch Response

Full-lamination technology breaks visual barriers, while ultra-slim bezels offer an immersive display. Every swipe feels fluid and instant. Where responsiveness meets comfort, each interaction is perfectly tuned.


Minimalist Form, Masterful Craft

Crafted from full-metal aluminum alloy—rigid yet remarkably light. Finished with premium metallic coating, smooth to the touch like refined skin. Every seam, every curve speaks of meticulous engineering and enduring elegance.

Dual-Axis, Effortless Motion

Smooth multi-angle adjustment with friction-free suspension. Supports 15.6” and 10.1” secondary screens, offering flexible expansion for diverse interactive scenarios.

15.6" Main Display




15.6" + 10.1"



15.6" + 15.6"




Single Hinges Base



Point of Sale - **S3P Model**

CREATE CONVENIENT LIFE

System	
Processor	RK3568 Quad-core Cortex-A55 up to 2.0GHz RK3576 Quad-Core Cortex-A72 + Quad-Core Cortex-A53, up to 2.2GHz
RAM	LPDDR4 4G for RK3568 LPDDR5 8G for RK3576
Storage	e-MMC 64G
OS	Android 11 for RK3568 Android 14 for RK3576
Power	
Power Supply	12V 84W / 24V 120W（with Expansion Dock）
Display	
Type	15.6" TFT LCD
Resolution	1920 x 1080
Brightness	350 nits
Touch	True-flat PCAP touch with multi-touch support
I/O Ports (Main Device)	
Serial	1*RJ11
USB	6*USB: 2*USB 3.0 - 4*USB 2.0 (1 occupied if base attached)
OTG USB	1 for RK3568
Cash Drawer	1, supporting 24V Cash Drawer
LAN	1*RJ45, 10 / 100 / 1000 MB
Display port	1*USB C (EDP), for Second Display
Audio	2*2W Internal Speaker for RK3568 2*3W Internal Speaker for RK3576
I/O Ports (Desktop stand)	
USB	2*USB 2.0
PoweredUSB	1*24V Powered USB 1*12V Powered USB
Physical & Environmental	
Dimension (W x D x H in mm)	367 x 300 x 318
Weight (N. W. in kg)	4.2Kg (Single screen)
Certification	CE / RoHS
Color	Black
Operating Conditions	0°C - 40°C, 20% RH - 90% RH
Storage Conditions	-20°C - 70°C, 10% RH - 90% RH
Options & Peripherals	
MSR	3 Tracks ISO/NFC
Customer Display	10.1" TFT LCD, 1280 x 800, 320 nits, Non-Touch or Touch 15.6" FHD, 1920 x 1080, 350 nits, Non-Touch or Touch
VFD	2x20 characters VFD
WiFi Module	Wi-Fi® 802.11 a/b/g/n/ac/ax 2.4G/5Ghz & BT4.0 for RK3568 Wi-Fi® 802.11 a/b/g/n/ac/ax 2.4G/5Ghz & BT5.4 for RK3576
Other peripherals	Printer 80mm / 58mm Barcode Scanner desktop Handheld Scanner Cash drawer



367mm




318mm

610mm



Folding Effect



VESA : 75*75mm



BASE PORTS

CE RoHS

Disclaimer: The product information and specifications are subject to change without prior notice

Qingdao CCL Technology Co., Ltd
Building D2, Floor 26, International Innovation Park
Laoshan District, Qingdao
China

CCL Tech SAS
29, Boulevard de la Paix
78100 Saint-Germain-en-Laye
France